



TEST REPORT

Mikro Vision Mop

Test item:	Domestic washing & bacteria pickup test
ISO standard:	6330:2021
Report no.:	DL-20241220-8
Test date:	17.10.2024
Issue date:	23.12.2024

Mikro Vision Mop



FA-24-27-B
FA-29-33-B
FA-43-47-B
FA-26-66-B

For test result please see next page



TEST METHOD


Mikro Vision Mop



Test conditions:

Test item		Pick-up rate (%)
Test bacteria		<i>Staphylococcus aureus</i> ATCC 6538
Test conditions	Amount of water	1 time of specimen weight
	Load weight	2 kg
	Surface	Vinyl tile (wax coated)
	Sliding range	30 cm
	Washing	Electrolux industry washing machine, 90 ° C Alkali detergent, 500 gange, pH=11
Pick-up rate (%)		$[(M_b - M_c) / M_b] \times 100$
		M_b = Average of the number of bacteria on the test surface before pick-up. (The amount of bacteria which was spread on the surface)
		M_c = Average of the number of bacteria on the test surface after pick-up. (The amount of bacteria on the surface after the wipe)

Illustration of the test method:

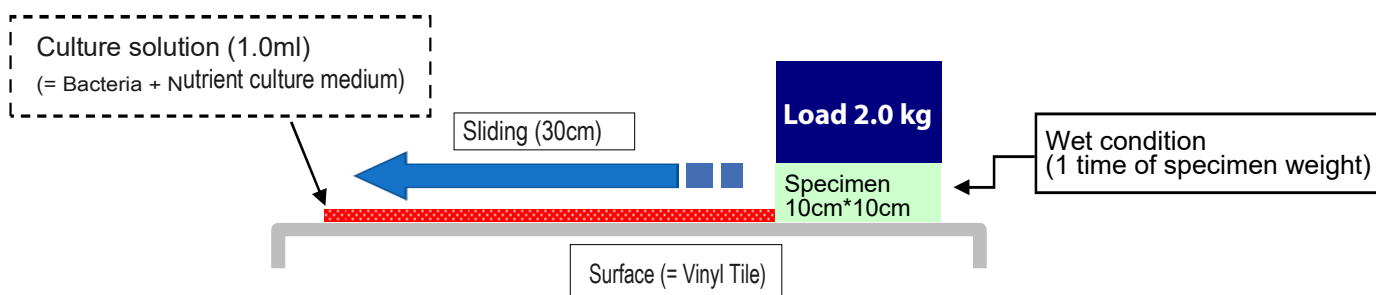




TEST RESULTS

Mikro Vision Mop

Test results:


Test bacteria	<i>Staphylococcus aureus</i> ATCC 6538		
Test surface	Vinyl tile (wax coated)		
Specimen	Mikro Vision Mop (original)	Mikro Vision Mop (After 300 washes 90 °C)	Mikro Vision Mop (After 500 washes 90 °C)
M _b	1,75 x 10 ⁶ CFU	2,45 x 10 ⁶ CFU	5,35 x 10 ⁶ CFU
M _c	<50	3,23 x 10 ³	1,60 x 10 ⁴
Bacteria pick-up rate (%)	99,9%	99,9%	98,8%

Before wipe:

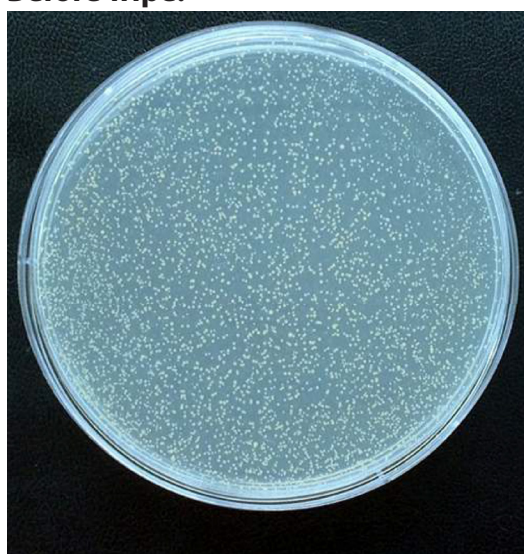

Bacteria
Staphylococcus aureus

After wipe:

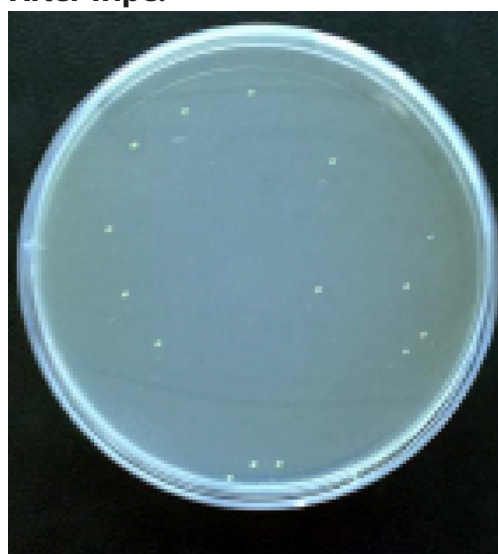

Bacteria
Staphylococcus aureus



TEST RESULTS

Mikro Vision Mop

Test item:	Domestic washing & bacteria pickup test
ISO standard:	6330:2021
Report no.:	DL-20241220-8
Test date:	17.10.2024
Issue date:	23.12.2024



CONCLUSION

Mikro Vision Mop has a documented pick-up rate of microorganisms of min. 99,7%.

The test result is based on test with bacteria within the group of microorganisms, where viruses also are included as a part of this group because of their sizes.

When microfiber product's ability to pick up microorganisms is tested, the size of the test object is pivotal. Thus, it is not important whether the microorganism is a bacterium or a virus. Microfiber does not distinguish between the types of microorganisms when they pick them up. Microfiber's ability to pick up microorganisms varies from product to product.

The tests are always conducted with bacteria within the art of microorganisms because of two reasons:

- 1) Bacteria constitute the most extensive health risk because they multiply and evolve with time.
Viruses disappear after a certain amount of hours.
- 2) Bacteria are more safe to use in tests and they are more accessible as test objects.



TEST REPORT

Mikro Vision Mop

Test item:	Removal of dust and dirt
Report no.:	DL-20230714-1
Test date:	10.07.2023
Issue date:	14.07.2023

Mikro Vision Mop



FA-24-27-B
FA-29-33-B
FA-43-47-B

For test result please see next page



TEST RESULT

Mikro Vision Mop

Test surface	Wooden floor			
Art. no.	FA-24-27-B FA-29-33-B FA-43-47-B Before washing		FA-24-27-B FA-29-33-B FA-43-47-B After washing (300 times)	
Condition	Dry	Damp	Dry	Damp
Turbidity before clean (Md)	2.36 NTU	0.88 NTU	3.70 NTU	2.86 NTU
Turbidity after clean (Mc)	58.23 NTU	50.19 NTU	52.39 NTU	46.54 NTU
Dust and dirt removal rate (%)	95.9%	98.3%	92.3%	93.9%

NTU = Nephelometric Turbidity Unit

The unit used to describe turbidity,
in other words the haziness of the water.

Nephelometric refers to the way the instrument,
a nephelometer, measures how much light is
scattered by suspended particles in the water.

The greater the scattering, the higher the turbidity.

Therefore, low NTU values indicate high water clarity,
while high NTU values indicate low water clarity. D



TEST METHOD

Mikro Vision Mop



Test conditions:

Test surface	Wooden floor
Sliding range	10x30 cm
Washing	Household washing machine, 90 °C Weak alkali detergent 0.2% Washing times: 300 times

Calculation of the removal rate:

$$\text{Removal rate (\%)} = \frac{\text{Turbidity of before clean (Md)} - \text{Turbidity of after clean (Mc)}}{\text{Turbidity before clean (Md)}} \times 100$$



TEST REPORT

Mikro Vision Mop

Test item: Autoclave
Report no.: DL-191030-5
Test date: 30.10.2019
Issue date: 30.10.2019

Mikro Vision Mop



FA-24-27-B
FA-29-33-B
FA-43-47-B
FA-62-66-B

For test results please see next page



TEST METHOD

Mikro Vision Mop



Test conditions:

Procedure	1 x wash + 1 x autoclave (= 1 cycle) Test result after 3 cycles
Wash	Industrial washing machine, 11 kg: 60 °C Load: 60% (6.6 kg) Detergent: pH 11 No dry tumbling
Autoclave	Is used right after wash 121 °C 30 min.

Autoclave is a specially developed machine for sterilisation of products.
The machine is filled with steam under pressure.
The product is being exposed to saturated steam
with a temperature of 121 °C in 30 minutes.






TEST RESULT

Mikro Vision Mop

Test result 1 (-) decrease (+) increase	Width	Length
Shrinkage	-2.3%	-5%
Art. no.	FA-24-27-B FA-29-33-B FA-43-47-B FA-62-66-B	

Test result 2

Visual check after autoclaving:

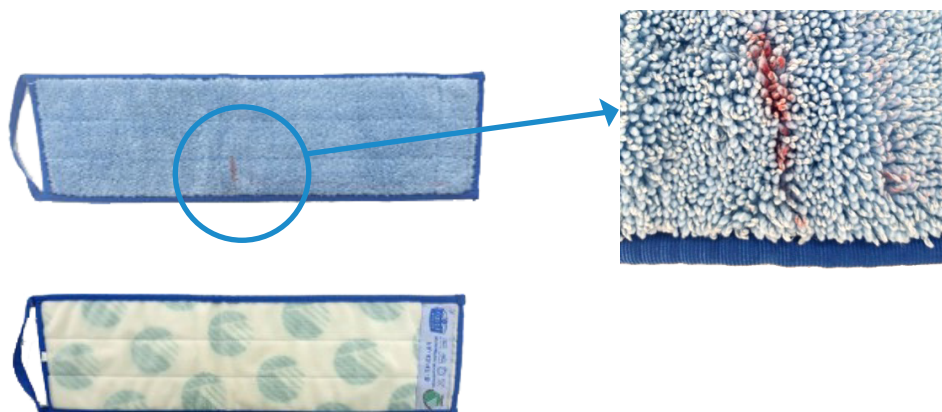

- No damage on the pile
- No change in the adhesive power of the velcro
- Color bleeding on the pile may happen when autoclaving with products in other colors
- Yellow color phenomenon can occur on the velcro
- Please note: use of autoclave reduces the washing guarantee with ca 50%
(Nordic Swan eco-labelled products tolerate +500 washes when washed correctly)