




# TEST REPORT

## Ultra Tentax Gentle LCD

|               |   |
|---------------|---|
| Test item:    | Domestic washing & bacteria pickup test |
| ISO standard: | 6330:2021                               |
| Report no.:   | DL-20241220-4                           |
| Test date:    | 17.10.2024                              |
| Issue date:   | 23.12.2024                              |

### Ultra Tentax Gentle LCD

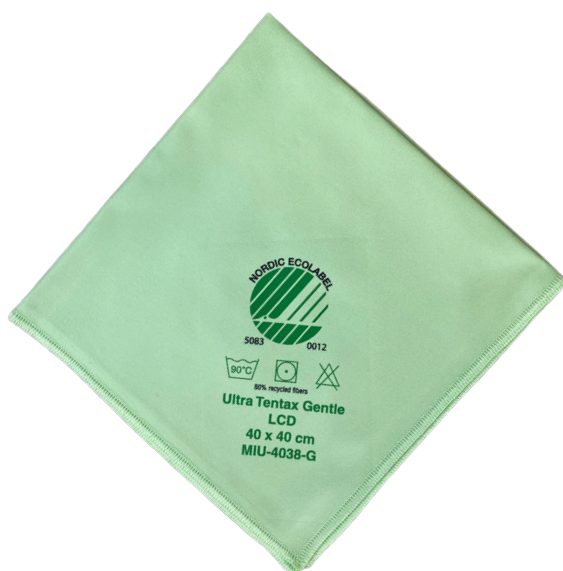

**MIU-4038-G**

For test result please see next page



# TEST METHOD


## Ultra Tentax Gentle LCD



### Test conditions:

|                         |                        |  |
|-------------------------|------------------------|--|
| <b>Test item</b>        |                        | Pick-up rate (%)   |
| <b>Test bacteria</b>    |                        | <i>Staphylococcus aureus</i> ATCC 6538   |
| <b>Test conditions</b>  | <b>Amount of water</b> | 1 time of specimen weight  |
|                         | <b>Load weight</b>     | 2 kg   |
|                         | <b>Surface</b>         | Vinyl tile (wax coated)  |
|                         | <b>Sliding range</b>   | 30 cm  |
|                         | <b>Washing</b>         | Electrolux industry washing machine, 90 ° C<br>Alkali detergent, 500 gange, pH=11  |
| <b>Pick-up rate (%)</b> |                        | $[(M_b - M_c) / M_b] \times 100$   |
|                         |                        | $M_b$ = Average of the number of bacteria on the test surface before pick-up. (The amount of bacteria which was spread on the surface) |
|                         |                        | $M_c$ = Average of the number of bacteria on the test surface after pick-up. (The amount of bacteria on the surface after the wipe)    |

### Illustration of the test method:

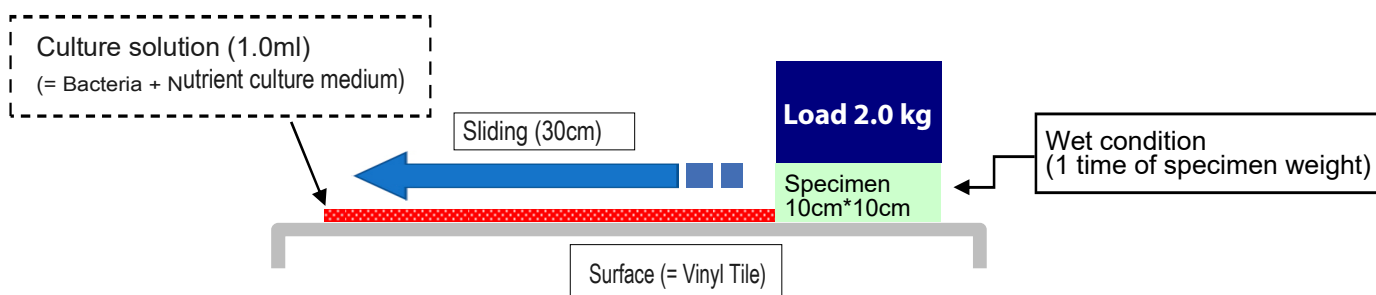




# TEST RESULTS

## Ultra Tentax Gentle LCD

### Test results:


|                           |   |   |   |
|---------------------------|---|---|---|
| Test bacteria             | <i>Staphylococcus aureus</i> ATCC 6538    |   |   |
| Test surface              | Vinyl tile (wax coated)                   |   |   |
| Specimen                  | <b>Ultra Tentax Gentle LCD (original)</b> | <b>Ultra Tentax Gentle LCD (After 300 washes 90 °C)</b> | <b>Ultra Tentax Gentle LCD (After 500 washes 90 °C)</b> |
| M <sub>b</sub>            | 1,43 x 10 <sup>6</sup> CFU                | 8,00 x 10 <sup>6</sup> CFU                              | 8,00 x 10 <sup>6</sup> CFU                              |
| M <sub>c</sub>            | <50                                       | <50   | 5,00 x 10 <sup>2</sup>                                  |
| Bacteria pick-up rate (%) | 99,9%                                     | 99,9%   | 99,9%   |

**Before wipe:**

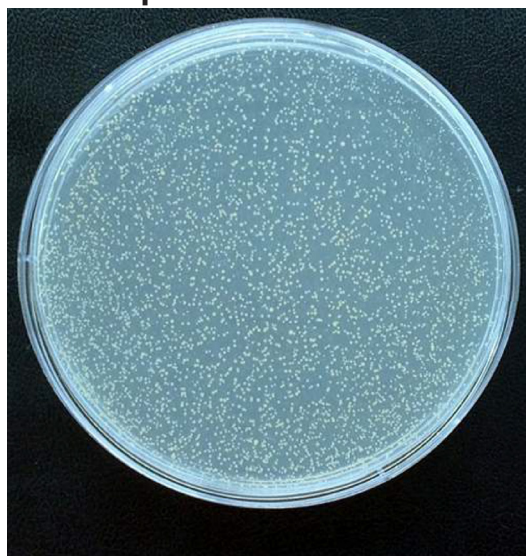

**Bacteria**  
**Staphylococcus aureus**

**After wipe:**

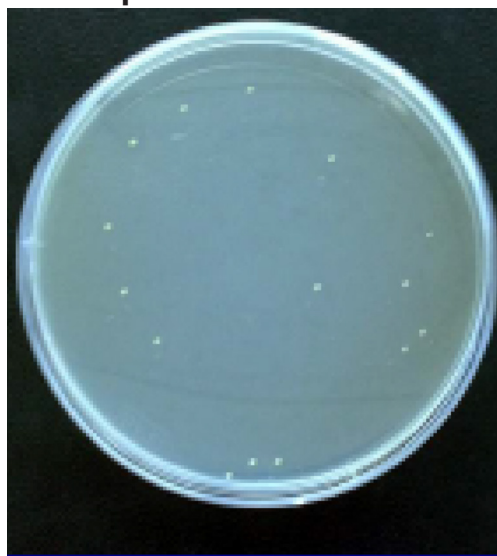

**Bacteria**  
**Staphylococcus aureus**



# TEST RESULTS

## Ultra Tentax Gentle LCD

|               |   |
|---------------|---|
| Test item:    | Domestic washing & bacteria pickup test |
| ISO standard: | 6330:2021                               |
| Report no.:   | DL-20241220-4                           |
| Test date:    | 17.10.2024                              |
| Issue date:   | 23.12.2024                              |



### CONCLUSION

**Ultra Tentax Gentle LCD cloth has a documented pick-up rate of microorganisms of min. 99,9%.**

The test result is based on test with bacteria within the group of microorganisms, where viruses also are included as a part of this group because of their sizes.

When microfiber product's ability to pick up microorganisms is tested, the size of the test object is pivotal. Thus, it is not important whether the microorganism is a bacterium or a virus. Microfiber does not distinguish between the types of microorganisms when they pick them up. Microfiber's ability to pick up microorganisms varies from product to product.

The tests are always conducted with bacteria within the art of microorganisms because of two reasons:

- 1) Bacteria constitute the most extensive health risk because they multiply and evolve with time.  
Viruses disappear after a certain amount of hours.
- 2) Bacteria are more safe to use in tests and they are more accessible as test objects.



# TEST REPORT

## Ultra Tentax Gentle Cloth

|             |                          |
|-------------|--------------------------|
| Test item:  | Removal of dust and dirt |
| Report no.: | DL-20230714-13           |
| Test date:  | 11.07.2023               |
| Issue date: | 14.07.2023               |

### Ultra Tentax Gentle Cloth



**MIU-4038-G**

For test result please see next page



# TEST RESULT

## Ultra Tentax Gentle Cloth

| Test surface                   | Wooden floor                 |              |   |              |
|--------------------------------|------------------------------|--------------|---|--------------|
| Art. no.                       | MIU-4038-G<br>Before washing |              | MIU-4038-G<br>After washing (300 times) |              |
| Condition                      | Dry                          | Damp         | Dry                                     | Damp         |
| Turbidity before clean (Md)    | 1.17 NTU                     | 0.89 NTU     | 1.88 NTU                                | 1.15 NTU     |
| Turbidity after clean (Mc)     | 47.71 NTU                    | 50.08 NTU    | 28.1 NTU                                | 25.97 NTU    |
| Dust and dirt removal rate (%) | <b>97.5%</b>                 | <b>98.2%</b> | <b>93.3%</b>                            | <b>95.6%</b> |

### NTU = Nephelometric Turbidity Unit

The unit used to describe turbidity,  
in other words the haziness of the water.

Nephelometric refers to the way the instrument,  
a nephelometer, measures how much light is  
scattered by suspended particles in the water.

The greater the scattering, the higher the turbidity.

Therefore, low NTU values indicate high water clarity,  
while high NTU values indicate low water clarity. D



# TEST METHOD

## Ultra Tentax Gentle Cloth



### Test conditions:

|               |  |
|---------------|--|
| Test surface  | Wooden floor   |
| Sliding range | 10x30 cm   |
| Washing       | Household washing machine, 90 °C<br>Weak alkali detergent 0.2%<br>Washing times: 300 times |

### Calculation of the removal rate:

$$\text{Removal rate (\%)} = \frac{\text{Turbidity of before clean (Md)} - \text{Turbidity of after clean (Mc)}}{\text{Turbidity before clean (Md)}} \times 100$$